



# Fötter

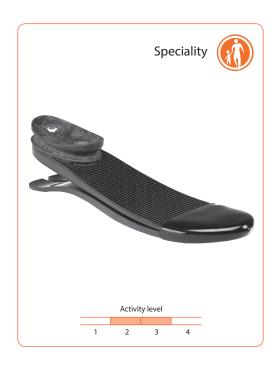


	Size	Hight	Weight
	(cm)	(mm)	(g)
LP Symes	22 - 25	43	420
	26 - 28	48	545
	29 - 31	53	670

Product weight includes foot shell. Measurements are approximate and will vary due to category selection and manufacturing.

### Foot Module Part Number



## Foot Shell Part Number



See the Cosmetic Foot Shell page for more detailed ordering instructions.

## LP Symes

Low on Height, High on Impact.

With clearances under 5 cm, the LP Symes Prosthetic Foot accommodates the build height requirements of Symes level amputees, while providing superior energy storage and return and a smooth and natural rollover. The LP Symes is an ideal component for K3/4 level amputees seeking a dynamic prosthetic foot component that is flexible and comfortable, yet also durable and capable of managing the considerable force generated by long residual limbs. The product incorporates a direct lamination cup, which keeps the distal mass as light as possible, reducing amputee energy expenditure during the gait cycle. An enhanced material tie-in groove located on the direct lamination cup has been enlarged to improve the ease of socket connection and lamination.

#### **Features**

- Carbon fiber construction is engineered to manage the high forces applied by Symes amputees, delivering flexibility and comfort in a durable design
- · Remarkably lightweight averaging 295g
- Direct lamination cup allows for less than 4,5 cm of clearance

### **Specs**

• Sizes: 22-31cm

User Weight Rating: 166 kg Stiffness Categories: 1-9

· Connector: Direct lamination cup

Heel Height: 10 mmWarranty: 36 months

Impact level			Weight (kg)
Low	Moderate	High	
1	1	2	44 - 52
1	2	3	53 - 59
2	3	4	60 - 68
3	4	5	69 -77
4	5	6	78 - 88
5	6	7	89 - 100
6	7	8	101 - 116
7	8	9	117 - 130
8	9		131 - 147
9			148 - 166